



# 5" STORZ X 4-1/2" INTEGRAL HYDRANT STORZ W/CAP & CABLE FOR MUELLER HYDRANT MODEL LVSTZIHM

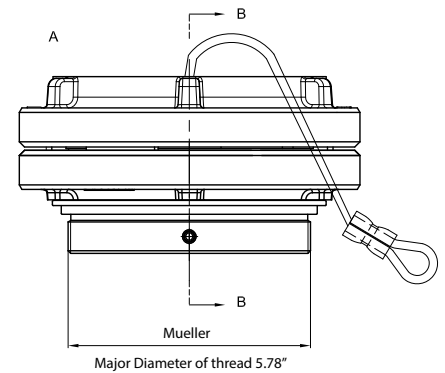

## DESCRIPTION:

- Installed directly into hydrant and secured with set screws
- For security purposes, a storz spanner wrench is required to remove the cap
- Cap opening torque requirement: 14.75 ft. lbs. to 25.82 ft. lbs.

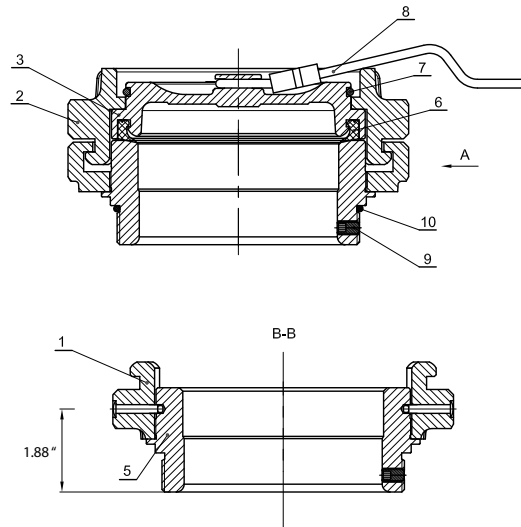

5" STORZ X 4-1/2" INTEGRAL HYDRANT STORZ W/ CAP & CABLE FOR MUELLER HYDRANT			
NO.	PART	MATERIAL ASTM SPECIFICATION	WEIGHT (lbs.)
1	Aluminum Connector-1	6061 (Aluminum Alloy)	1.47
2	Aluminum Connector-1	6061 (Aluminum Alloy)	2.08
3	Baffle Plate	6061 (Aluminum Alloy)	1.34
4	Open Round Head Rivet	AL	
5	Connector	C83600	6.84
6	Sealing Ring	EPDMA (A70+3)	0.07
7	Retaining Ring	304	0.08
8	Steel Wire Rope	Componet	0.11
9	Screw Plug	304	
10	O-Ring	NBRA (A70±5)	0.01

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	