




DESCRIPTION:

- 120 VAC: 6", 8", 10"
- 24 VDC: 6", 8", 10"
- Four wire, 120 and 24 volt
- Specify voltage when ordering
- Indoor and outdoor Installation

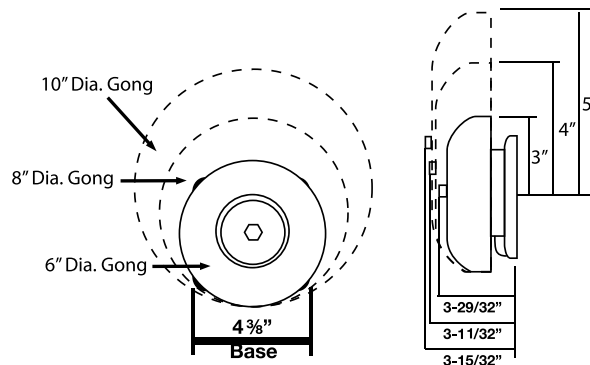


VOLTAGE 24 VDC					
6" GONG SIZE - AB2406		8" GONG SIZE - AB2408		10" GONG SIZE - AB2410	
RATED CURRENT	SOUND LEVEL 10ft	RATED CURRENT	SOUND LEVEL 10ft	RATED CURRENT	SOUND LEVEL 10ft
100mA	96dB	100mA	96dB	100mA	96dB

VOLTAGE 120 VAC					
6" GONG SIZE - AB12006		8" GONG SIZE - AB12008		10" GONG SIZE - AB12010	
RATED CURRENT	SOUND LEVEL 10ft	RATED CURRENT	SOUND LEVEL 10ft	RATED CURRENT	SOUND LEVEL 10ft
46mA	98dB	46mA	98dB	46mA	98dB

WIRING INSTRUCTIONS


D.C. BELLS (observe polarity)

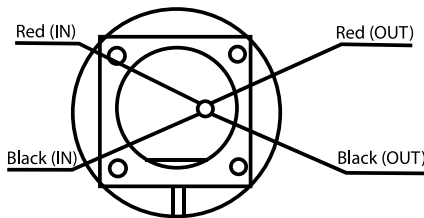

When electrical supervisor is required use in and out leads as shown.

1. Observe polarity to ring DC Bells
2. Red wires positive(+)
3. Black wires negative (-)

A.C. BELLS

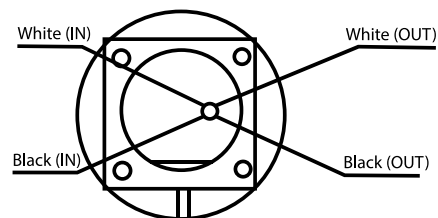

When electrical supervisor is required use in and out leads as shown.

1. When using AC bells, terminate each extra wire separately after last bell.
2. End-of-line resistor is not required on AC Bells

PROJECT		APPROVAL STAMP
PROJECT:		<input type="checkbox"/> APPROVED
ADDRESS:		<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:		<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:		REMARKS:
NOTES 1:		
NOTES 2:		